

TN-35F • TN-35FB(P)邦迪 (A/Y/H型管)

半自動高速繞線機 High Speed Cross Cone Winder (For Bonded yarn)

Max. 10000 r.p.m.
Max. 1600m/min (800~1400m/min)
TN-35FB(P)-Y
Max. 4000 r.p.m.
Max. 1000m/min (400~800m/min)



多功能微電腦控制面板
Micro processor controller




配合人機操作控制面板
Individual spindle control



外觀尺寸 | Dimension

unit: mm

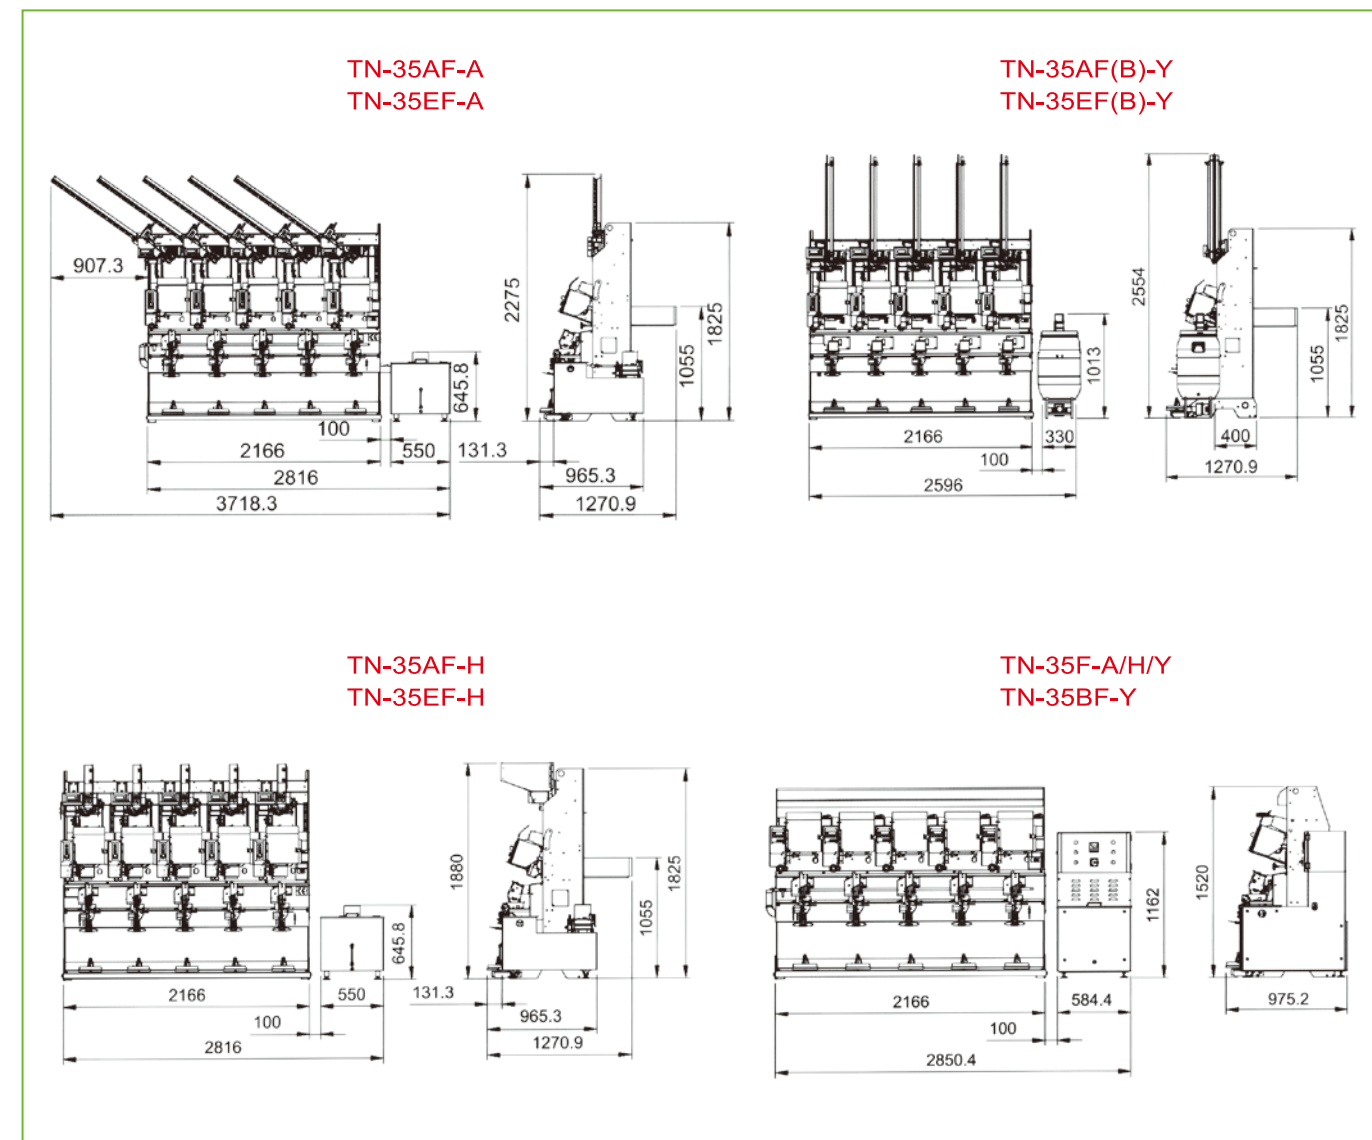

MATERIAL PRODUCTS



TAINING

Professional Sewing Thread Winders.

TN-35 Series

規格 | Specifications

成型 Package shape	TYPE - A			TYPE - Y			TYPE - Y (Bonded)			TYPE - H		
型號 model	TN-35AF-A	TN-35EF-A	TN-35F-A	TN-35AF(P)-Y	TN-35EF(P)-Y	TN-35F(P)-Y	TN-35AFB(P)-Y	TN-35EFB(P)-Y	TN-35FB(P)-Y	TN-35AF-H	TN-35EF-H	TN-35F-H
管子角度 Taper angle	2° 20' ~ 5° 57'			0° ~ 2° 20'			0° ~ 2° 20'			0°		
產量 Capacity	180 LBS/8hrs 40/2SP			280 LBS/8hrs 210D/2 Nylon			240 LBS/8hrs 210D/2 Nylon			2600~2900 PCS/8hrs 40/2 500M		
最大捲取外徑 Max. outer Ø	110 mm			85 mm			90 mm			75 mm		
橫動量 Traverse	3" ~ 4"			2" ~ 4"			3" ~ 4"			2" ~ 3"		
錠數 No. of spindle	5			5			5			4		
主軸速度 Spindle speed	Max. 10000 r.p.m.			Max. 10000 r.p.m.			Max. 4000 r.p.m.			Max. 15000 r.p.m. Max. 13000 r.p.m. Max. 10000 r.p.m.		
線速度 Yarn speed	Max. 1600m/min (800~1400m/min)			Max. 1600m/min (800~1400m/min)			Max. 1000m/min (400~800m/min)			Max. 1600m/min (800~1400m/min)		
花紋回數 Cross ratio	2.5~4			2.5~4			2.5~4			2.5~4		
包裝材積 Measurement	230L x 90W x 190H (cm)		230Lx90Wx160H (cm)	230L x 90W x 190H (cm)		230Lx90Wx160H (cm)	230L x 90W x 190H (cm)		230Lx90Wx160H (cm)	230L x 90W x 190H (cm)		230Lx90Wx160H (cm)
機器重量 Weight	N.W: 900kgs G.W: 1100 kgs		N.W:550kgs G.W:700kgs	N.W: 900kgs G.W: 1100 kgs		N.W:550kgs G.W:700kgs	N.W: 900kgs G.W: 1100 kgs		N.W:550kgs G.W:700kgs	N.W: 900kgs G.W: 1000 kgs		N.W:550kgs G.W:700kgs

機器設計及規格如有變更恕不另行通知。 All specifications and designs subject to change without notice.



FACTORY

泰能機器工業股份有限公司
TAINING MACHINE INDUSTRIAL CO., LTD.
台灣43251台中市大肚區沙田路三段734巷35號
35, Lane 734, Sec 3, Sha Tien Rd., Dadu Dist.,
Taichung City 43251, Taiwan
TEL: 886-4-2699-1213 FAX: 886-4-2699-6533
E-mail: taining@ms14.hinet.net
http://www.taining.tw
www.taining.com.tw
www.winder.com.tw

OFFICE

盈俞股份有限公司
INWIN W & R CORPORATION
台灣40358台中市西區向上路一段79巷50號4F
4F., No.50, Lane. 79, Sec. 1, Xiangshang Rd.,
West Dist., Taichung City 40358, Taiwan
TEL: 886-4-2301-0980 FAX: 886-4-2301-2267
E-mail:taining@inwin.tw



A Cone

Y King Spool

H Spool

